
TECHNICAL DATA SHEET

MT 1335

Manitou Telescopic

easy




 **MANITOU**
HANDLING YOUR WORLD


	MT 1335 easy	MT 1335 H easy	MT 1335 HA easy
Lifting			
Max. capacity	3500 kg		
Max. lifting height	12.55 m		
Max. outreach	8.75 m		
Break-out force with bucket (ISO 8313)	6400 daN		
Unladen time			
Lifting	10.0 s		
Lowering	8.0 s		
Extension	14.0 s		
Retraction	10.0 s		
Crowd	4.0 s		
Dump	4.0 s		
Tyres	400 / 80 -24		
Braking			
Service brake	oil immersed multi-disc braking		
Parking brake	automatic negative parking brake		
Engine	DEUTZ - STAGE 3B - FINAL TIER 4		
Type	TD 3.6 L		
Cubic capacity	3621 cm³		
Power	75 HP/55.4 kW		
Max torque	330 Nm		
Injection	direct		
Cooling	water		
Laden drawbar pull	8000 daN		
Transmission	torque converter	hydrostatic	
Reversing shift	electrohydraulic control		
Number of gears (forward/reverse)	4/4	3/2	
Drive wheels	4 wheel drive		
Steering mode	4 wheel steer - 3 steering modes		
Max. travel speed (may vary according to applicable regulations)	25 kph		
Hydraulics			
Pump	gear type with priority valve 125 l/min – 270 bar		
Capacities			
Hydraulic oil	125 l		
Fuel	120 l		
Unladen weight (with forks)	9100 kg	9200 kg	
Dimensions			
1. Front wheel centre to carriage	1.80 m		
2. Wheelbase	2.88 m		
3. Rear wheel centre to rear face	1.18 m		
4. Overall length to carriage	5.86 m		
5. Ground clearance	0.42 m		
6. Overall width of cab	0.88 m		
7. Inside tyre width	1.87m		
8. Overall width	2.28 m		
9. Overall width (stabilizers lowered)	2.28 m		
10. Overall height	2.42 m		
Turning radius (over tyres)	3.65 m		
Carriage rotation (crowd / dump)	12° /114°		
Standard forks (length x width x thickness)	1200 x 125 x 45 mm		
Frame levelling	in option		
Controls	JSM ®(Multi-function joystick)		
Safety	Load limiter cut off system - EN 15000 norm ROPS / FOPS level II standard cab		
Noise and vibration			
Noise at driving position (LpA)	78 dB		
Environmental noise (LwA)	103 dB		
Vibration to whole hand/arm	<2.50 m/s²		

Rough terrain load chart
Standard EN 1459B

Machine with forks on tyres



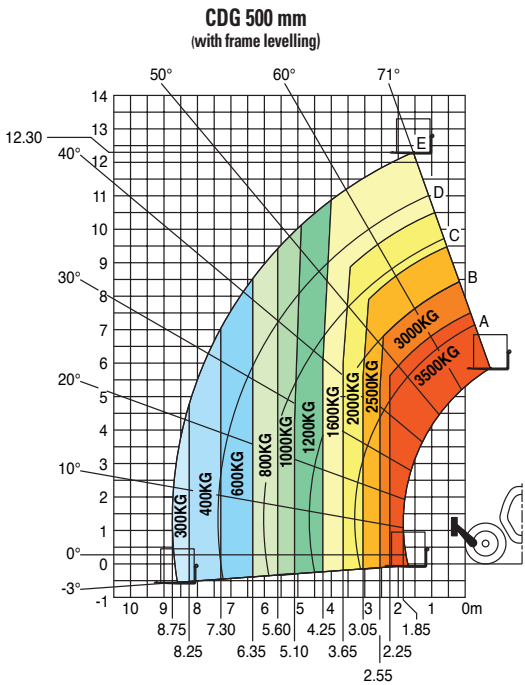


Machine with forks on stabilizers

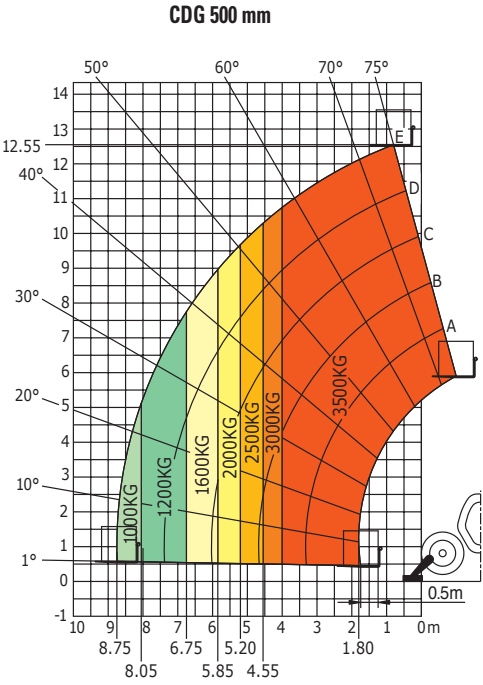

Machine with platform on stabilizers

(MT 1335 HA)

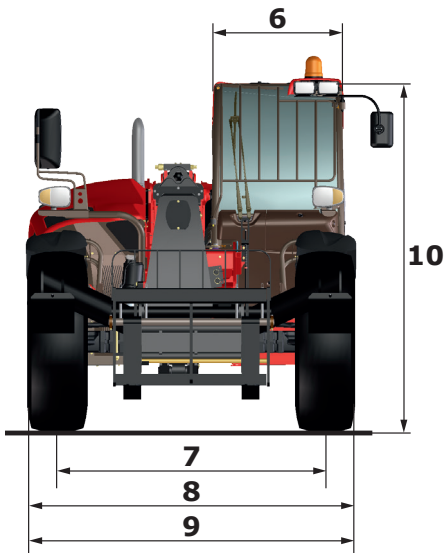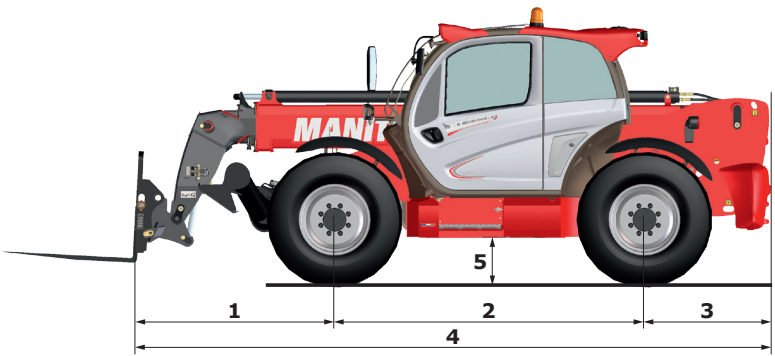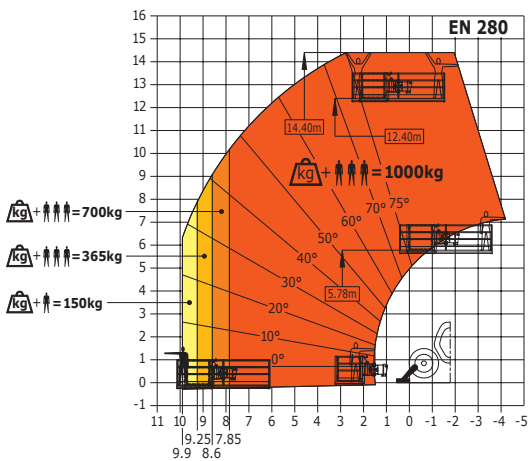

Your MANITOU dealer



Head office :
B.P. 249 - 430 rue de l'Aubinière - 44158 Ancenis Cedex - France
Phone.: +33 (0)2 40 09 10 11 - Fax: +33 (0)2 40 09 10 97
www.manitou.com

